

Typical Applications

Industrial

Compressors
Process Controls
Instruments & Test Equipment
Sterilizers
Air Pressure

Transportation

Oil & Fuel Pressure
Coolant Pressure
Agricultural Equipment
CNG & Natural Gas Engines



Description

The P500 incorporates Kavlico's 4th generation ceramic capacitive sense element with the latest state-of-the-art ASIC. Available in brass or stainless steel housings, this multi-purpose sensor is rugged by design. Highly reliable, the P500 is ideal for measuring a broad range of process media including hydrocarbon based fluids, air, and gases.

The P500 package has a built-in Metri-Pack 150 series sealed electrical connector and is available with popular pressure connection thread options. The sensor is offered with seal materials suitable for diverse applications. Standard pressure ranges are available in PSI or Bar.

Specifically intended for high volume OEM applications, the P500 delivers the optimal solution without compromising performance or reliability.

Standard Full Scale Pressure Ranges

0-15 through 0-1,000 PSI
0-1 through 0-70 Bar
Absolute and Sealed Gage

Features

- UL Certified Component
- Small Size (3/4" Hex)
- External Hex for Easy Installation
- Linear Amplified Output
- Temperature Compensated
- Superior Long-Term Stability
- Low Power Consumption
- Minimum Life Expectancy: Ten Million Cycles
- Outstanding Shock & Vibration Performance
- 36V Over Voltage and Reverse Polarity Protection

Technical Specifications

Note: Performance Specifications with 5 Vdc \pm 0.002 Vdc supply at 25°C


Pressure Ranges:	See "How to Order"
Proof Pressure:	3x F.S. Pressure (up to 200 PSI [14 Bar]) 2x F.S. Pressure (above 200 PSI [14 Bar])
Burst Pressure:	1,500 PSI [100 Bar] (up to 350 PSI [24 Bar]) 2,500 PSI [170 Bar] (above 350 PSI [24 Bar])
Supply Voltage:	5.0 \pm 0.5 Vdc
Supply Current:	<5 mA
Nominal Output Voltage:	0.5 to 4.5 Vdc
Linearity Error:	< \pm 0.5% of Span
Total Error Band¹:	\pm 1.5% of Span (0°C \leq T \leq 85°C) \pm 2.0% of Span (T < 0°C, T > 85°C)
Output Impedance:	<100 Ω
Over Voltage Protection:	36 Vdc
Reverse Polarity Protection:	-36 Vdc
Operating Temperature:	-40°C to +125°C (Seal Material Dependent)
Storage Temperature:	-40°C to +125°C (Seal Material Dependent)
Service Life:	10 Million Full Pressure Cycles (Minimum)
Vibration:	10 g's Peak-to-Peak Sine (10 to 2,000 Hz)
Mechanical Shock:	75 g's, 1/2 Sine Wave
Stability:	\pm 0.5% of Full Span over 1-Year
Response Time:	< 2ms to 63% of Final Output Voltage with step change in Input Pressure
Housing Material:	Brass (P \leq 350 PSIA [24 BarA]) 304 Stainless Steel (P > 350 PSIA [24 BarA])
Weight:	< 50 grams
Electrical Termination:	Packard Electric Metri-Pack 150 Series ²
Pressure Connection:	See "How to Order"
Output Load:	> 10 k Ω

1) Total Error Band includes all sources of error, including effects of Offset, Span, Temperature and Accuracy

2) Electrical termination (black) for pressure ranges \leq 350 PSI [24 Bar], (white) for pressure ranges > 350 PSI [24 Bar]

P500 Next Generation Ceramic Pressure Sensor

Dimensions in: mm [inches]

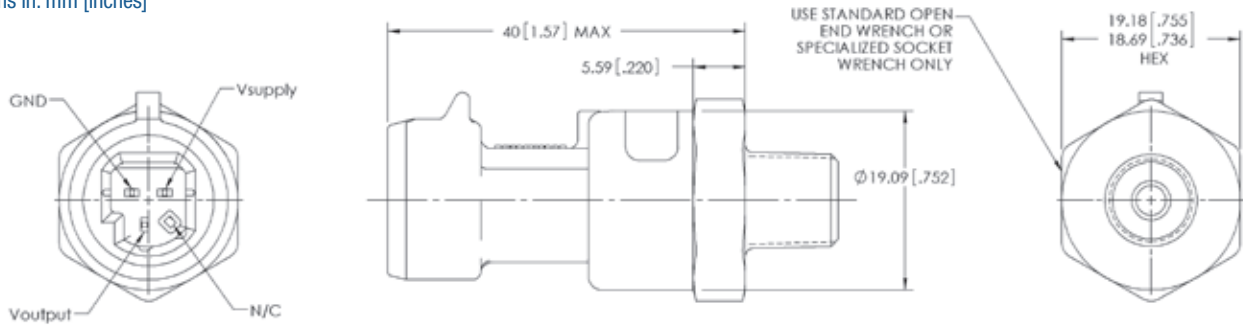

How to Order

Shown with Pressure Connection "Option 4" from How to Order chart

Use this diagram, working top to bottom and left to right to construct your model number. An example is shown below. Custom OEM options are also available.

P500 Next Generation Ceramic Pressure Sensor			
Pressure Ranges			
15	0 – 15 PSI	1B	0 – 1 Bar
20	0 – 20 PSI	1.6B	0 – 1.6 Bar
30	0 – 30 PSI	2.5B	0 – 2.5 Bar
50	0 – 50 PSI	4B	0 – 4 Bar
75	0 – 75 PSI	6B	0 – 6 Bar
100	0 – 100 PSI	10B	0 – 10 Bar
150	0 – 150 PSI	16B	0 – 16 Bar
200	0 – 200 PSI	25B	0 – 25 Bar
300	0 – 300 PSI	40B	0 – 40 Bar
500	0 – 500 PSI	50B	0 – 50 Bar
750	0 – 750 PSI	70B	0 – 70 BarA Only
1000	0 – 1000 PSIA Only	XXB	0 – XX Bar
XXX	0 – XXX PSI (Large Volume Only)		(Large Volume Only)
Reference			
A	Absolute		
S	Sealed Gage (Referenced to 14.7 PSIA)		
Seal Material			
D	Fluorocarbon / Viton (-25° to +125°C)		
E	Fluorosilicone (-40° to +125°C)		
F	Ethylene Propylene (-40° to 120°C)		
Pressure Connection			
1	1/4-18 NPT (External Threads)		
4	1/8-27 NPT (External Threads)		
5	Stud End DIN 3852-B-G 1/4 (External Threads)		
6	Tapped Hole DIN 3852-Y-G 1/4 (Internal Threads)		
9	3/8-24 UNF-2A Per SAE J1926/2 (External Threads)		
10	3/8-24 UNF-2B Per SAE J1926/2 (External Threads)		
Electrical Connection*			
A	With Mating Connector, w/12", 18 AWG Leads		
C	Without Mating Connector		

P500 -100 - A - E 1 A

Example: P500-100-A-E1A

Description: P500 Sensor, 0-100 PSI Absolute, Fluorosilicone Seal Material, 1/4-18 NPT Pressure Connection, with Mating Connector

Don't see exactly what you want?
Call us at +1 (805) 523-2000 to customize this product to meet your application-specific needs!

Kavlico warrants that its products will be free from defective materials and workmanship for a period of one (1) year from date of delivery to the original purchaser and that its products will conform to Kavlico's specifications or standards. Any product found to be defective will be replaced or repaired at the sole option of Kavlico. EXCEPT AS STATED ABOVE, KAVLICO MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, AND SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, NON-INFRINGEMENT OR OF ANY OTHER KIND. Additionally, Kavlico will not be liable and provides no guarantee, responsibility, or warranties of any kind concerning the suitability or related to the use of its product(s) for the life support market or to be used in life support systems, safety or emergency systems, critical care applications, human implantation, aviation, nuclear facilities, or systems or any other applications where product failure could lead to injury to persons, loss of life, harm to the environment, or catastrophic property damage.

Note: Kavlico reserves the right to change its specifications at any time without notice.



14401 Princeton Ave. • Moorpark, CA 93021 USA
Tel: +1 (805) 523-2000 • Fax: +1 (805) 523-7125
Web: www.kavlico.com
Email: pressure.sensors@kavlico.com

